齐陆工贸
QILU

PRODUCT BROCHURE



REGULAR TRACTOR
CUSTOMIZER TRACTOR
ATTACHMENT & IMPLEMENTS

山东齐陆工贸有限公司
Shandong Qilu Industrial Co.,Ltd.

公司地址：山东省济宁市兖州区SOHO A座
Block A, SOHO, Yanzhou District, Jining City,
Shandong Province

公司网站：www.qilumachinery.com
www.qilutractor.com



CONTENT
目录

01 公司信息 Company Profile 1-2页

02 工厂展示 Factory Show 3-4页

03 主营产品 Main Product

- 常规型拖拉机 Regular Tractor 5-47页
- 特殊型拖拉机 Customizer Tractor 48-58页
- 附件&农机具 Attachment & Implements 59-100页

04 市场区域及服务 Market Distribution & Service 101-102页

05 发展战略规划 Development Plan 103-104页



COMPANY PROFILE
公司信息

山东齐陆工贸有限公司是一家致力于提供多元化产品与服务的领先综合性集团公司。

Shandong Qilu Industrial Co., Ltd. is a leading comprehensive group company committed to providing diversified products and services.

齐陆农机事业部成立于2016年，销售人员30+，以轮式拖拉机及配套机具的出口销售、服务为主体业务，目前涵盖25-260 马力轮式拖拉机、九大产品系列，能够完全满足旱田、水田、大地块、丘陵、大棚等多种作业环境。

Qilu Agricultural Machinery Division was established in 2016, with more than 30 sales staff. Its main business is the export, sales and service of wheeled tractors and supporting equipment. It currently covers 25-260 horsepower wheeled tractors and nine product series, which can fully meet the needs of dry fields. , paddy fields, large plots, hills, greenhouses and other working environments.

我司合作工厂拥有6个标准化车间，3条轮式拖拉机生产线，包含 56个工序，306 个工步，拥有变速箱装配线、后桥装配线、底盘总成装配线、底盘涂装线、总装线等多条自动流水线，年设计产能12000台轮式拖拉机。产品已通过3C和ISO9001国际质量体系认证，所有产品均按国际标准生产。

Our company's factory has 6 standardized workshops and 3 wheeled tractor production lines, including 56 processes and 306 work steps. It has a gearbox assembly line, a rear axle assembly line, a chassis assembly line, a chassis painting line, a final assembly line, etc. An automatic assembly line with an annual designed production capacity of 12,000 wheeled tractors. The products have passed 3C and ISO9001 international quality system certification, and all products are produced in accordance with international standards.

提供多种定制化解决方案，农机事业部与工厂研发部两位一体，针对欧洲市场专门研发了欧五排放标准的机型；助力葡萄酒文化，为西亚葡萄牙用户提供定制宽度1.1-1.5m的果园拖拉机；聆听客户需求，在澳洲市场上推出的工程型拖拉机取得用户高度认可；根据蒙古牧场的需求，搭配高质高作业效率的圆盘割草机和打捆机。

We offer multiple customized solutions. QILU farmmachinery department and the factory R&D department work hand-in-hand to develop machines specifically for the European market that meet Euro V emission standards. We promote wine culture by providing customized orchard tractors with widths of 1.1-1.5m for customers in Western Asia Portugal. We listen to customer needs and have received high recognition from users for the engineering tractors launched in Australia. According to the requirements of Mongolian ranches, we offer disc mowers and bale binders with high quality and efficient operation.

充分发挥中国供应链优势，与多家国内知名农具厂和属具厂建立紧密合作关系，可以提供目前国际市场上主流产品，如前端装载机、反铲挖土机、连枷割草机、旋耕机、圆捆机、播种机等，以满足客户的多样化需求。

Qilu Agricultural Machinery Division makes full use of China's supply chain advantages and has established close cooperative relationships with many well-known domestic agricultural equipment and attachment factories. It can provide mainstream products in the international market, such as front-end loaders, backhoes, flail cutters, etc. Grass trimmers, rotary tillers, round balers, seed drills, etc. to meet the diverse needs of customers.

截至2023年底，齐陆已在世界范围内27个国家签约40余家合作经销商，主要海外市场集中在西亚、中亚、东南亚、欧洲、南美、大洋洲、北非等地区。拖拉机累计国外销量3000余台，在行业内已建立良好的口碑和客户基础。

By the end of 2023, Qilu has signed cooperation distributors in more than 40 countries worldwide, mainly focusing on regions such as Western Asia, Central Asia, Southeast Asia, Europe, South America, Oceania, and North Africa. The cumulative foreign sales of tractors have exceeded 3,000 units, establishing a good reputation and customer base in the industry.

在未来，齐陆农机事业部将紧跟国家政策导向，积极参与国际合作与竞争，定期赴海外进行线下地推。我们将始终坚持以客户为中心，以一流的产品筛选标准、环环相扣的供应服务体系，将更多优质的中国农机产品带给世界人民，助力全球农业事业发展。

In the future, Qilu's agricultural machinery division will closely follow national policy guidelines, actively participate in international cooperation and competition, and regularly conduct overseas offline promotions. We will always adhere to a customer-centric approach, utilizing top-tier industry selection standards and a closely-knit supply service system to bring more high-quality Chinese agricultural machinery products to people around the world, thus contributing to the development of global agriculture.

FACTORY SHOW
工厂展示

工厂总占地面积20万平方米，拥有国内较为先进的生产线、机械加工、冲压、铆焊设备和各种工装模具，满足先进的生产制造工艺。

Our factory covers a total area of 200,000m² and is equipped with advanced production lines, machining, stamping, riveting and welding equipment, and various tooling molds to meet advanced manufacturing processes.

车间布局有分装线、总装线、检测线。所有装配起于分装线、成于总装线、终于检测线，经过完整的生产与检测流程后入库保存，按照发货时间先后分别置于露天成品区与室内成品区。

The workshop layout includes assembly lines, final assembly lines, and inspection lines. All assemblies start from the sub-assembly line, proceed to the final assembly line, and end with the inspection line. After going through a complete production and inspection process, they are stored in the warehouse. According to the order of shipment, they are placed in the outdoor finished product area and indoor finished product area.





01

REGULAR TRACTOR MODEL
常规机型

- 25-50马力拖拉机
  25-50HP Model
- 25-50马力拖拉机
  25-50HP Model
- 25-50马力拖拉机
  25-50HP Model
- 25-50马力拖拉机
  25-50HP Model
- 25-50马力拖拉机
  25-50HP Model
- 25-50马力拖拉机
  25-50HP Model

25-50HP Model
马力拖拉机





产品底盘代号：TY
Series Code: Y

- 型号：QL254(Y)/QL304(Y)/QL404(Y)/QL454(Y)/QL504(Y)
  Model: QL254(Y)/QL304(Y)/QL404(Y)/QL454(Y)/QL504(Y)
- 该TY系列底盘可匹配25-50马力区间，底盘适应性好，稳定性好
  *This series match 20-50HP, with strong adaptability and good stability
- 可根据用户灵活配置遮阳棚，安全架，驾驶室，提高驾乘舒适感
  *Optional sunshade, rops, cabin accordning to needs
- TY 8+2变速箱，简便易操作，技术稳定，售后维修有保障
  *8F+2R gearbox with easy operation and convenient maintenance
- 后轮距有级可调，适应不同农作物的种植和作业需求
  *Adjustable wheeltrack, adapt to a variety of crop needs

Engine

发动机



- 选取国内名牌发动机，标配莱动，可选扬动、锡柴等品牌，质量可靠

  *Standard Laidong Brand, optional YTO/Xichai brand

- 25-30马力使用3缸发动机，35-50马力使用4缸发动机，动力充沛

  *25-30HP with 3 cylinder, 35-50HP with 4 cylinder

- 自然吸气，双作用空滤器，清洁型强；采用水冷，散热功能出众

  *Naturally aspirated, water-cooled, dual stage air filter

- 机械直列泵设计，不配备ECU系统，便于维护和检修

  *Mechanical in-line pump design, no ECU, easy to maintain

- 机油消耗率低，全负荷油耗低，燃油经济性好

  *Good fuel economy, low oil consumption, low full load fuel consumption

Front Axle

前驱动桥



- 全密封防水防泥设计，驰骋水田旱地无忧虑

  *Fully sealed mud and water proof design

- 精密内部传动设计与制作，使用寿命更长

  *Precise internal transmission design and manufacturing, longer service life

- 中置油缸，独立油路全液压转向，左右转向半径一致，转向角≤50°

  *Center-mounted cylinder, Independent oil circuit fully hydraulic steering, steering angle ≤ 50°

- 加强型桥壳体设计，刚性更强

  *Reinforced axle housing design for greater rigidity

- 传动比设计比率：14.538/12.214/12.674

  *Transmission ratio: 14.538/12.214/12.674

Rear Working System

后工作装置



- 机械三点悬挂1类，可搭配中小型农机参与农业作业

  *Mechanical 3-point linkage cat I

- 选配1组或2组液压输出，用于配备液压型农机具工作

  *1 or 2 pair hydraculic output to match different implements

- 标配U型拖挂，可选择摆式牵引用于拖车和其他牵引类机具

  *U type traction, optional swing drawbar, use for trailer

- PTO转速可选540/720或540/1000，6键输出轴，对标国际标准

  *PTO Speed 540/720 or 540/1000, Ø35, 6 Rectangular Spline

- 选装强升强降装置，应对地块较硬的开垦耕翻任务

  *Optional Hydraulic Lifter for harder terrain

Driving Position

驾驶台



- 中置或侧置挂档，为不同体型的人群量身打造

  *Center or side shift, meet the operational convenience of different groups groups of people

- 四驱和两驱一键切换，切换杆位于左侧地板，操作省时省力

  *4WD and 2WD switch lever is on the floor, one click switch

- 机械弹簧减震座椅，减少行进颠簸，缓解驾驶疲劳

  *Mechanical shock-absorbing seats reduce work fatigue

- 拼接式地板设计，拆卸装柜更方便，降低运输成本

  *Spliced flooring, easy for CKD/SKD package, load more in container

- 驾驶室可带暖风和风扇，进一步提升驾驶舒适性

  *Cabin with heater and fan, improve comfort

Common Engine Hood Style

常用机罩样式



1. 中远大棚王1号 *ZYZKION Greenhouse King No.1
2. 中远大棚王2号 *ZYZKION Greenhouse King No.2
3. 中远金刚罩1号 *ZYZKION King Kong No.1
4. 中远金刚罩2号 *ZYZKION King Kong No.2
5. 中远金刚罩3号 *ZYZKION King Kong No.3



Optional Tire Type

可选轮胎款式

1. 平花胎 *R-1, Flat pattern tire
2. 水田胎 *PR-1, Paddy tire
3. 农业子午胎 *R-1W, Radial Tire
4. 工业轮胎 *R-4, Industrial Tire
5. 草地轮胎 *M-9, Grass tire

Parameter

25-50HP参数表

型号 Model	QL254(Y)	QL304(Y)	QL354(Y)
动力 Power	25马力/18.4千瓦 25HP/18.4KW	30马力/22.1千瓦 30HP/22.1KW	35马力/25.7千瓦 35HP/25.7KW
驱动 Wheel Drive	4×4	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	3250*1300*2070mm（带遮阳棚） 3250*1300*2070mm(With sunshade)	3250*1300*2070mm（带遮阳棚） 3250*1300*2070mm(With sunshade)	3310*1300*2070mm（带遮阳棚） 3310*1300*2070mm(With sunshade)
标准档位 Grar Shift	8+2档 8F+2R Shift	8+2档 8F+2R Shift	8+2档 8F+2R Shift
离合器 Clutch	单作用离合 Single stage	单作用离合 Single stage	单作用离合 Single stage
标准轮胎 Standard Tire R-1	6.0-16/9.5-24	6.0-16/9.5-24	6.0-16/9.5-24
选配轮胎 Optional Tire R-1	6.5-16/12.4-24, 7.5-16/12.4-24	6.5-16/12.4-24, 7.5-16/12.4-24	6.5-16/12.4-24, 7.5-16/12.4-24
动力输出 PTO	540/720 或 540/1000 540/720 or 540/1000	540/720 或 540/1000 540/720 or 540/1000	540/720 或 540/1000 540/720 or 540/1000
重量 Weight	1510KG（带遮阳棚），1730KG（带驾驶室） 1510KG(With sunshade), 1730KG(With cabin)	1510KG（带遮阳棚），1730KG（带驾驶室） 1510KG(With sunshade), 1730KG(With cabin)	1510KG（带遮阳棚），1730KG（带驾驶室） 1510KG(With sunshade), 1730KG(With cabin)
油箱容量 Fuel Tank	35L/50L	35L/50L	35L/50L

型号 Model	QL404(Y)	QL504(Y)
动力 Power	40马力/29.4千瓦 40HP/29.4KW	50马力/36.8千瓦 50HP/36.8KW
驱动 Wheel Drive	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	3350*1320*2070mm（带遮阳棚） 3350*1320*2070mm(With sunshade)	3350*1320*2070mm（带遮阳棚） 3350*1320*2070mm(With sunshade)
标准档位 Grar Shift	8+2档 8F+2R Shift	8+2档 8F+2R Shift
离合器 Clutch	单作用离合 Single stage	单作用离合 Single stage
标准轮胎 Standard Tire R-1	6.0-16/9.5-24	6.0-16/9.5-24
选配轮胎 Optional Tire R-1	6.5-16/12.4-24, 7.5-16/12.4-24	6.5-16/12.4-24, 7.5-16/12.4-24
动力输出 PTO	540/720 或 540/1000 540/720 or 540/1000	540/720 或 540/1000 540/720 or 540/1000
重量 Weight	1510KG（带遮阳棚），1730KG（带驾驶室） 1510KG(With sunshade), 1730KG(With cabin)	1510KG（带遮阳棚），1730KG（带驾驶室） 1510KG(With sunshade), 1730KG(With cabin)
油箱容量 Fuel Tank	35L/50L	35L/50L

50-70HP Model

马力拖拉机



产品底盘代号：TE

Series Code: E

- 型号：QL504(E)/QL604(E)/QL704(E)

  Model: QL504(E)/QL604(E)/QL704(E)

- 该TE系列底盘可匹配50-70马力区间，底盘可靠，配套供应稳定

  *This series match 50-70HP, it's a reliable chassis and stable supporting system

- 可根据用户灵活配置遮阳棚，安全架，平地板驾驶室

  *Optional sunshade, rops, cabin accordning to needs

- TE 8+8变速箱，简便易操作，技术稳定，维修有保障

  *8F+8R gearbox with easy operation and convenient maintenance

- 后轮距0.96-1.2M有级可调，适应不同农作物的种植和作业需求

  *Adjustable wheeltrack, adapt to a variety of crop needs

Engine

发动机

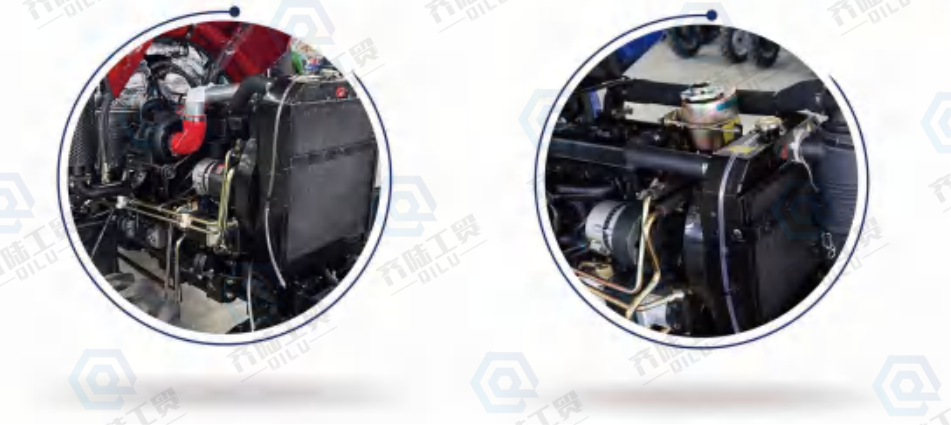

- 选取国内名牌发动机，标配莱动，可选扬动、锡柴、云内等品牌，质量可靠

  *Standard Laidong Brand, optional YTO/Xichai/Yuneni brand

- 全系4缸发动机，60-70马力采用涡轮增压，动力更强

  *All 4-cylinder engines, 60-70HP with turbo charging

- 双作用空滤器，清洁型强；采用水冷，散热功能出众

  *Naturally and turbo, water-cooled, dual stage air filter

- 机械直列泵设计，不配备ECU系统，便于维护和检修

  *Mechanical in-line pump design, no ECU, easy to maintain

- 选装内置空滤器，安装前端装载机时的结构设计更合理

  *Optional built-in air filter makes modified front loader structure more reasonable

Front Axle

前驱动桥





- 全密封防水防泥设计，驰骋水田旱地无忧虑

  *Fully sealed mud and water proof design

- 精密内部传动设计与制作，使用寿命更长

  *Precise internal transmission design and manufacturing, longer service life

- 中置油缸，独立油路全液压转向，左右转向半径一致，转向角≤50°

  *Center-mounted cylinder, Independent oil circuit fully hydraulic steering, steering angle ≤ 50°

- 加强型桥壳体设计，刚性更强

  *Reinforced axle housing design for greater rigidity

- 传动比设计比率：14.538/12.214/12.674

  *Transmission ratio: 14.538/12.214/12.674

Rear Working System

后工作装置





- 机械三点悬挂1类或2类，可搭配中小型农机参与农业作业

  *Mechanical 3-point linkage cat I or II, with floating control

- 选配1组或2组液压输出，用于配备液压型农机具工作

  *1 or 2 pair hydraculic output to match different implements

- 标配U型拖挂，可选择摆式牵引用于拖车和其他牵引类机具

  *U type traction, optional swing drawbar, use for trailer

- PTO转速可选540/720或540/1000，6键输出轴，对标国际标准

  *PTO Speed 540/720 or 540/1000, ∅35, 6 Rectangular Spline

- 镀锌液压管路，管内壁清洁度高，可承受压力更大，耐腐蚀性好

  *Galvanized oil pipe, with high pipe wall cleanliness and good corrosion resistance

Driving Position

驾驶位置



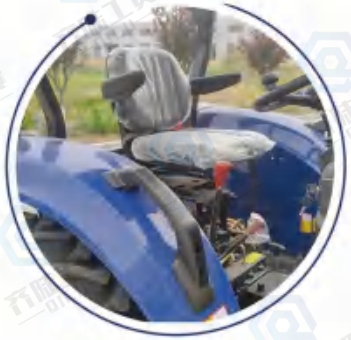

- 侧置挂档方式，解放腿部空间，更方便舒适

  *Side shift, frees up leg space and is more convenient and comfortable

- 四驱和两驱一键切换，切换杆位于左侧地板，操作省时省力

  *4WD and 2WD switch lever is on the floor, one click switch

- 机械弹簧减震座椅，减少行进颠簸，缓解驾驶疲劳

  *Mechanical shock-absorbing seats reduce work fatigue

- 组合式仪表盘，水温、油量、速度一目了然

  *Combined instrument panel, water temperature, oil volume and speed are clear at a glance

- 选配全封闭驾驶室，可加空调、暖风、MP3，设计贴近现代化

  *Enclosed flat floor cabin optional A/C and heater, improve comfort

Common Engine Hood Style

常用机罩样式



1. 中远金刚罩1号 *ZYZKION King Kong No.1
2. 中远金刚罩2号 *ZYZKION King Kong No.2
3. 中远金刚罩3号 *ZYZKION King Kong No.3



Optional Tire Type

可选轮胎款式

1. 平花胎 *R-1, Flat pattern tire
2. 水田胎 *PR-1, Paddy tire
3. 农业子午胎 *R-1W, Radial Tire
4. 工业轮胎 *R-4, Industrial Tire
5. 草地轮胎 *M-9, Grass tire

Parameter

50-70HP参数表

型号 Model	QL504(E)	QL604(E)	QL704(E)
动力 Power	50马力/36.8千瓦 50HP/36.8KW	60马力/44.1千瓦 60HP/44.1KW	35马力/25.7千瓦 35HP/25.7KW
驱动 Wheel Drive	4×4	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	3450*1450*2210mm（带遮阳棚） 3450*1450*2210mm(With sunshade)	3450*1450*2210mm（带遮阳棚） 3450*1450*2210mm(With sunshade)	3510*1480*2240mm（带遮阳棚） 3510*1480*2240mm(With sunshade)
标准档位 Grar Shift	8+8档 8F+8R Shuttle Shift	8+8档 8F+8R Shuttle Shift	8+8档 8F+8R Shuttle Shift
离合器 Clutch	双作用离合 Dual stage	双作用离合 Dual stage	双作用离合 Dual stage
标准轮胎 Standard Tire R-1	6.5-16/12.4-24	6.5-16/12.4-24	6.5-16/12.4-24
选配轮胎 Optional Tire R-1	7.5-16/12.4-24, 7.5-16/11.2-28, 8.3-20/12.4-28	7.5-16/12.4-24, 7.5-16/11.2-28, 8.3-20/12.4-28	7.5-16/12.4-24, 7.5-16/11.2-28, 8.3-20/12.4-28
动力输出 PTO	540/720 或 540/1000 540/720 or 540/1000	540/720 或 540/1000 540/720 or 540/1000	540/720 或 540/1000 540/720 or 540/1000
重量 Weight	1630KG（带遮阳棚），1860KG（带驾驶室） 1630KG(With sunshade), 1860KG(With cabin)	1670KG（带遮阳棚），1900KG（带驾驶室） 1670KG(With sunshade), 1900KG(With cabin)	1780KG（带遮阳棚），2010KG（带驾驶室） 1780KG(With sunshade), 2010KG(With cabin)
油箱容量 Fuel Tank	35L/50L	35L/50L	35L/50L

70-100HP Model

马力拖拉机



产品底盘代号：TB

Series Code: B

- 型号：QL704(B)/QL804(B)/QL904(B)/QL1004(B)

  Model: QL704(B)/QL804(B)/QL904(B)/QL1004(B)

- 该TB系列底盘可匹配70-100马力区间，底盘更大更稳重

  *This series match 20-50HP, chassis is larger and more stable

- 可根据用户灵活配置遮阳棚，安全架，平地板空调驾驶室

  *Optional sunshade, rops, A/C cabin accordning to needs

- TB 12+12变速箱，可选装同步器换挡，换挡更轻柔，冲击力小

  *12+12 gearbox with optional synchronizer, ensuring smoother shifting and lower shift shock

- 刹车系统使用通风盘刹，制动力强，散热性能好

  *Equipped with disc brakes, strong braking power and good heat dissipation performance

Engine

发动机





- 选取国内名牌发动机，标配莱动，可选扬动、新柴、全柴等品牌，质量可靠

  *Standard Laidong Brand, optional YTO/xinchai/quanchai brand

- 全系4缸涡轮增压发动机，11寸离合器，动力传递效率高，扭矩储备大

  *Turbocharger, 11 inch clutch, high power transmission efficiency

- 干式双作用空滤器，清洁性强且易清洗；可选装液压油散热器，延长作业时间

  *Dry type, dual stage air filter, easy to clean and maintain; optional hydraulic oil cooler for extended operating duration

- 管路布排合理，保证美观的同时也将液压能传递最大化

  *The popeline layout is reasonable to ensure max. hydraulic energy transfer

- 选装内置空滤器，安装前端装载机时的结构设计更合理

  *Optional built-in air filter makes modified front loader structure more reasonable

Front Axle

前驱动桥





- 全密封防水仿泥设计，水田作业优势显著，充分满足水田作业用户的需求

  *Fully sealed mud and water proof design, paddy field work has remarkable results

- 精密内部传动设计与制作，使用寿命更长

  *Precise internal transmission design and manufacturing, longer service life

- 中置油缸，独立油路全液压转向，左右转向半径一致，转向角≤50°

  *Center-mounted cylinder, Independent oil circuit fully hydraulic steering, steering angle ≤ 50°

- 加高地隙，不易被杂草灌木刮蹭，提高了拖拉机的通过性

  *Increase the ground clearance to improve the tractor's passability

- 最大承载力≤1400KG，坚固耐用

  *Max.load capacity ≤ 1400KG, strong and sturdy

Rear Working System

后工作装置





- 机械三点悬挂2类，提升力强劲；力位综合控制和浮动控制

  *Mechanical 3-point linkage, comprehensive force and position control and floating control

- 选配2组液压输出，用于配备液压型农机具工作

  *Standard 2 pair hydraculic output to match different implements

- 标配U型拖挂，可选择摆式牵引用于拖车和其他牵引类机具

  *U type traction, optional swing drawbar, use for trailer

- PTO转速可选540/720或540/1000，6键输出轴，对标国际标准

  *PTO Speed 540/720 or 540/1000, Ø35, 6 Rectangular Spline

- 可选第三提升器操作杆，实现单人挂接农机具，节省人力物力

  *Optional third operating lever allows one person to mount agricultural machinery

Driving Position

驾驶台





- 配备12F+12R梭式换挡，F-R档位位于方向盘左下方，减少换向疲劳度

  *12F+12R shuttle shift, F-R gear under the side of steering wheel

- 全平地板设计，底盘无裸漏，腿部空间更大

  *Fully flat floor design, no exposed chassis, more leg room

- L/H/M 三档速度，满足不同作业场景使用

  *L/H/M three speeds to meet different working scenarios

- 左手操作的独立PTO控制器，切断动力输出更简单

  *Independent PTO controller for left-hand operation, making easier to cut off PTO rotation

- 可调节方向盘高度，量身定制属于自己的驾驶舱

  *Adjustable steering wheel, customize your own cockpit

Common Engine Hood Style

常用机罩样式



1. 中远TB2号 *ZYZKION TB No.1 Hood
2. 中远TB1号 *ZYZKION TB No.1 Hood
3. 中远刀锋机罩 *ZYZKION Blade Style Hood



Optional Tire Type

可选轮胎款式

1. 平花胎 *R-1, Flat pattern tire
2. 水田胎 *PR-1, Paddy tire
3. 农业子午胎 *R-1W, Radial Tire
4. 草地轮胎 *M-9, Grass tire

Parameter

70-100HP参数表

型号 Model	QL704(B)	QL804(B)
动力 Power	70马力/51.5千瓦 70HP/51.5KW	80马力/58.8千瓦 80HP/58.8KW
驱动 Wheel Drive	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	4080*1720*2670mm	4080*1720*2670mm
标准档位 Grar Shift	12+12梭式档 12F+12R Shuttle Shift	12+12梭式档 12F+12R Shuttle Shift
离合器 Clutch	双作用离合 Dual stage	双作用离合 Dual stage
标准轮胎 Standard Tire R-1	9.5-24/14.9-30	9.5-24/14.9-30
选配轮胎 Optional Tire R-1	11.2-20/16.9-28	11.2-20/16.9-28, 12.4-24/18.4-30
动力输出 PTO	540/720 或 540/1000 540/720 or 540/1000	540/720 或 540/1000 540/720 or 540/1000
重量 Weight	2730KG（带遮阳棚），2950KG（带驾驶室） 2730KG(With sunshade), 2950KG(With cabin)	2730KG（带遮阳棚），2950KG（带驾驶室） 2730KG(With sunshade), 2950KG(With cabin)
油箱容量 Fuel Tank	70L	70L

型号 Model	QL904(B)	QL1004(B)
动力 Power	90马力/66.2千瓦 90HP/66.2KW	100马力/73.5千瓦 100HP/73.5KW
驱动 Wheel Drive	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	4080*1720*2670mm	4080*1720*2670mm
标准档位 Grar Shift	12+12梭式档 12F+12R Shuttle Shift	12+12梭式档 12F+12R Shuttle Shift
离合器 Clutch	双作用离合 Dual stage	双作用离合 Dual stage
标准轮胎 Standard Tire R-1	9.5-24/14.9-30	9.5-24/14.9-30
选配轮胎 Optional Tire R-1	11.2-20/16.9-28, 12.4-24/18.4-30	11.2-20/16.9-28, 12.4-24/18.4-30
动力输出 PTO	540/720 或 540/1000 540/720 or 540/1000	540/720 或 540/1000 540/720 or 540/1000
重量 Weight	2780KG（带遮阳棚），3000KG（带驾驶室） 2780KG(With sunshade), 3000KG(With cabin)	2780KG（带遮阳棚），3000KG（带驾驶室） 2780KG(With sunshade), 3000KG(With cabin)
油箱容量 Fuel Tank	70L	70L

90-130HP Model

马力拖拉机



产品底盘代号：TD
Series Code: D

- 型号：QL904(D)/QL1004(D)/QL1204(D)/QL1304(D)

  Model: QL904(D)/QL1004(D)/QL1204(D)/QL1304(D)

- 该TD系列底盘可匹配90-130马力区间，加粗前后桥，承载力更强

  *This series match 90-130HP, chassis is larger and more stable

- 所有齿轮采用斜齿啮合结构，不易打齿，啮合更平稳，传动效率更高

  *Helical gear meshing structure, meshing more smoothly

- TD 16+8变速箱，带爬行档，适合犁地、播种等作业

  *16F+8R gearbox with creeper, suitable for plowing, sowing and other operations

- 全车高密封性油管，耐压力性能好，液压系统工作非常顺畅

  *High-sealing oil pipe will not leak oil, which improves the smoothness of work

- 刹车系统使用液压盘刹，制动力大，抗热衰退性能强，操作简便

  *Hydraulic disc brake, large braking force, strong resistance to thermal decay

Engine

发动机



- 选取国内名牌发动机，标配东方红，可选玉柴，品控有保障

  *Standard YTO Brand, optional Yuchai brand

- 动力强，动力储备≥20%；扭矩大，扭矩储备25%-30%

  *Power reserve ≥ 20%, torque reserve 25%-30%, more powerful

- 沙漠型空滤器，清洁型强，性能更先进，不惧恶劣环境和高负荷工作

  *Desert air filter with more advanced performance

- 涡轮增压或增压中冷式进气方式，用户可根据作业环境来选配

  *Turbocharged or intercooled, choose according to the working environment

- 配备一拖众成离合器，金属陶瓷材质，不易烧片

  *YTO ZC brand metal-ceramic clutch, not easy to burn discs

Front Axle

前驱动桥





- 采用复合油封，耐磨抗腐蚀，不易老化，极大程度的减少气液泄露几率

  *Fully sealed mud and water proof design

- 内部结构包括四级减速，边减为双锥及行星减速，中央传动可选配差速锁

  *Four-stage reduction, optional differential lock for central transmission

- 中置油缸，独立油路全液压转向，左右转向半径一致，转向角≤50°

  *Center-mounted cylinder, Independent oil circuit fully hydraulic steering, steering angle ≤ 50°

- 多系列的传动比更灵活的满足不同客户需求

  *Multiple transmission ratios to meet diverse customer needs

- 最大承载力≤2000KG，坚固耐用，负载能力强

  *Max.load capacity ≤ 2000KG, strong and sturdy

Rear Working System

后工作装置





- 机械三点悬挂2类，最大提升力2200KG；力位综合控制和浮动控制

  *Hydraulic 3-point linkage, Max.lift capacity 2200KG, with floating control

- 标配2组或3组液压输出，用于配备液压型农机具工作

  *Standard 2 or 3 pair hydraculic output to match different implements

- 标配U型拖挂，可选择摆式牵引用于拖车和其他牵引类机具

  *U type traction, optional swing drawbar, use for trailer

- PTO转速可选540/720或540/1000，6键输出轴，对标国际标准

  *PTO Speed 540/720 or 540/1000, ∅35, 6 Rectangular Spline

- 半分置式液压系统，液压流量40-48L

  *Multi-way valve distributor hydraulic flow 40-48L

Driving Position

驾驶位置



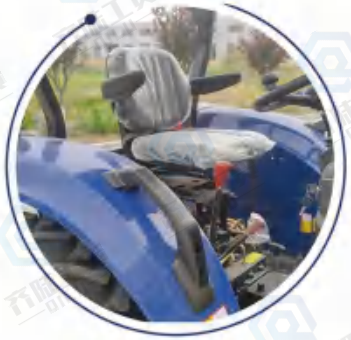

- 航空级气垫座椅，舒适性、安全性较机械减震座椅更高

  *Aviation-grade air cushion seat, wider cushion, higher comfort

- 可选10寸倒车影像，支持中、英、法、俄、德、葡、西、意八国语言

  *10-inch reverse camera, available in 8 languages

- 液压助力离合踏板，减轻驾驶员脚部负担，降低驾驶疲劳

  *Hydraulic clutch pedal reduces driving fatigue

- 侧置独立手刹，驻车效果更好，安全性更高

  *Independent handbrake, better parking effect and higher safety

- 车内静音设计，添加隔音材料，密封性优良

  *Silent interior design, added sound insulation materials, and excellent sealing

Common Engine Hood Style

常用机罩样式



1. 中远大黄蜂1号 *ZYZKION Hornet No.1
2. 中远大黄蜂2号 *ZYZKION Hornet No.2
3. 中远大黄蜂3号 *ZYZKION Hornet No.1
4. 中远大黄蜂1X *ZYZKION Hornet No.1X



Optional Tire Type

可选轮胎款式

1. 平花胎 *R-1, Flat pattern tire
2. 农业子午胎 *R-1W, Radial Tire

Parameter

90-130HP参数表

型号 Model	QL904(D)	QL1004(D)
动力 Power	90马力/66.2千瓦 90HP/66.2KW	100马力/73.5千瓦 100HP/73.5KW
驱动 Wheel Drive	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	4710*2200*2980mm	4800*2200*2980mm
标准档位 Grar Shift	12+8爬行档 12F+8R Creeper Shift	12+8爬行档 12F+8R Creeper Shift
离合器 Clutch	干式双作用离合 Dry type, Dual stage	干式双作用离合 Dry type, Dual stage
标准轮胎 Standard Tire R-1	12.4-24/16.9-34	12.4-24/16.9-34
选配轮胎 Optional Tire R-1	12.4-24/18.4-30, 11.2-28/13.6-38	12.4-24/18.4-30, 11.2-28/13.6-38, 14.9-24/18.4-34
动力输出 PTO	540/1000 或 760/1000 540/1000 or 760/1000	540/1000 或 760/1000 540/1000 or 760/1000
重量 Weight	4500KG	4500KG
油箱容量 Fuel Tank	140L	140L

型号 Model	QL1204(D)	QL1304(D)
动力 Power	120马力/88.2千瓦 120HP/88.2KW	130马力/95.6千瓦 130HP/95.6KW
驱动 Wheel Drive	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	4800*2200*2980mm	4830*2200*2980mm
标准档位 Grar Shift	12+8爬行档 12F+8R Creeper Shift	12+8爬行档 12F+8R Creeper Shift
离合器 Clutch	干式双作用离合 Dry type, Dual stage	干式双作用离合 Dry type, Dual stage
标准轮胎 Standard Tire R-1	12.4-24/16.9-34	12.4-24/16.9-34
选配轮胎 Optional Tire R-1	12.4-24/18.4-30, 11.2-28/13.6-38, 14.9-26/18.4-38	12.4-24/18.4-30, 11.2-28/13.6-38, 14.9-26/18.4-38
动力输出 PTO	540/1000 或 760/1000 540/1000 or 760/1000	540/1000 或 760/1000 540/1000 or 760/1000
重量 Weight	4500KG	4500KG
油箱容量 Fuel Tank	140L	140L

130-180HP Model

马力拖拉机



产品底盘代号：TF

Series Code: F

- 型号：QL1304(F)/QL1404(F)/QL1504(F)/QL1604(F)/QL1804(F)

  Model: QL1304(F)/QL1404(F)/QL1504(F)/QL1604(F)/QL1804(F)

- 该TF系列底盘可匹配130-180马力区间，加粗前后桥，承载力更强

  *This series match 130-180HP, chassis is larger and more stable

- 所有齿轮采用斜齿啮合结构，不易打齿，啮合更平稳，传动效率更高

  *Helical gear meshing structure, meshing more smoothly

- TF 16+8变速箱，选配24+8档超慢速爬行档，适合犁地、开沟、播种等作业

  *16F+8R gearbox with, optional 24+8 creeper, suitable for plowing, trenching and sowing operations

- 300L加大主副双油箱，满足长时间作业需求，提高工作效率

  *300L fuel tank extends working time and improves work efficiency

- 刹车系统使用液压盘刹，制动力大，抗热衰退性能强，操作简便

  *Hydraulic disc brake, large braking force, strong resistance to thermal decay

Engine

发动机





- 选取国内名牌发动机，标配东方红，可选玉柴、潍柴等品牌，品控有保障

  *Standard YTO Brand, optional Yuchai and Weichai brand

- 动力强，动力储备≥20%；扭矩大，扭矩储备25%-30%

  *Power reserve ≥ 20%, torque reserve 25%-30%, more powerful

- 沙漠型空滤器，清洁型强，性能更先进，不惧恶劣环境和高负荷工作

  *Desert air filter with more advanced performance

- 管路布排合理，保证美观的同时也将液压能传递最大化

  *The popeline layout is reasonable to ensure max. hydraulic energy transfer

- 14寸干式双作用离合器，让换挡更平稳，可承受的扭矩输出更大

  *14-inch dry type dual stage clutch makes shifting smoother

Front Axle

前驱动桥





- 可扩展升级功能，可选限滑差速器

  *Expandable functions, optional limited-slip differential

- 内部结构包括四级减速，边减为双锥及行星减速，中央传动可选配差速锁

  *Four-stage reduction, optional differential lock for central transmission

- 中置油缸，独立油路全液压转向，左右转向半径一致，转向角≤50°

  *Center-mounted cylinder, Independent oil circuit fully hydraulic steering, steering angle ≤ 50°

- 多系列的传动比更灵活的满足不同客户需求

  *Multiple transmission ratios to meet diverse customer needs

- 最大承载力≤2600KG，坚固耐用，负载能力强

  *Max.load capacity ≤ 2600KG, strong and sturdy

Rear Working System

后工作装置



- 机械三点悬挂2类，分置式强压油缸，最大提升力3000KG

  *Hydraulic 3-point linkage cha II, Max.lift capacity 3000KG

- 标配3组液压输出，用于配备液压型农机具工作

  *Standard 3 pair hydraculic output to match different implements

- 标配U型拖挂，可选择摆式牵引用于拖车和其他牵引类机具

  *U type traction, optional swing drawbar, use for trailer

- PTO转速可选540/1000或760/1000，6键输出轴，对标国际标准

  *PTO Speed 540/1000 or 760/1000, Ø35, 6 Rectangular Spline

- 道依茨同款大业牌齿轮泵，半分置式液压系统，液压流量44-52L

  *DAYE brand gear pump, hydraulic flow 44-52L

Driving Position

驾驶台



- 航空级加宽气垫座椅，舒适性、安全性更高

  *Aviation-grade air cushion seat, wider cushion, higher comfort

- 可选10寸倒车影像，支持中、英、法、俄、德、葡、西、意八国语言

  *10-inch reverse camera, available in 8 languages

- 液压助力离合踏板，减轻驾驶员脚部负担，降低驾驶疲劳

  *Hydraulic clutch pedal reduces driving fatigue

- 侧置独立手刹，驻车效果更好，安全性更高

  *Independent handbrake, better parking effect and higher safety

- LED数显仪表盘，车辆状态信息一目了然，汽车级驾驶体验

  *LED digital dashboardl, give you a car-level driving experience

Common Engine Hood Style

常用机罩样式

1. 中远大黄蜂1号 *ZYZKION Hornet No.1
2. 中远大黄蜂2号 *ZYZKION Hornet No.2
3. 中远大黄蜂3号 *ZYZKION Hornet No.1
4. 中远大黄蜂1X *ZYZKION Hornet No.1X





Optional Tire Type

可选轮胎款式

1. 平花胎 *R-1, Flat pattern tire
2. 农业子午胎 *R-1W, Radial Tire

Parameter

130-180HP参数表

型号 Model	QL1304(F)	QL1404(F)	QL1504(F)
动力 Power	130马力/95.6千瓦 130HP/95.6KW	140马力/103千瓦 140HP/103KW	150马力/110.3千瓦 150HP/110.3KW
驱动 Wheel Drive	4×4	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	5150*2320*3210mm	5150*2320*3210mm	5150*2320*3210mm
标准档位 Grar Shift	16+8爬行档 16F+8R Creeper Shift	16+8爬行档 16F+8R Creeper Shift	16+8爬行档 16F+8R Creeper Shift
离合器 Clutch	干式双作用离合 Dry type, Dual stage	干式双作用离合 Dry type, Dual stage	干式双作用离合 Dry type, Dual stage
标准轮胎 Standard Tire R-1	14.9-26/18.4-38	14.9-26/18.4-38	14.9-26/18.4-38
选配轮胎 Optional Tire R-1	Double rear 18.4-38	Double rear 18.4-38	Double rear 18.4-38
动力输出 PTO	540/1000 或 760/1000 540/1000 or 760/1000	540/1000 或 760/1000 540/1000 or 760/1000	540/1000 或 760/1000 540/1000 or 760/1000
重量 Weight	5500KG	5500KG	5500KG
油箱容量 Fuel Tank	246L/332L	246L/332L	246L/332L

型号 Model	QL1604(F)	QL1804(F)
动力 Power	160马力/117.6千瓦 160HP/117.6KW	180马力/132.3千瓦 180HP/132.3KW
驱动 Wheel Drive	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	5150*2320*3210mm	5150*2320*3210mm
标准档位 Grar Shift	16+8爬行档 16F+8R Creeper Shift	16+8爬行档 16F+8R Creeper Shift
离合器 Clutch	干式双作用离合 Dry type, Dual stage	干式双作用离合 Dry type, Dual stage
标准轮胎 Standard Tire R-1	14.9-26/18.4-38	14.9-26/18.4-38
选配轮胎 Optional Tire R-1	Double rear 18.4-38	Double rear 18.4-38
动力输出 PTO	540/1000 或 760/1000 540/1000 or 760/1000	540/1000 或 760/1000 540/1000 or 760/1000
重量 Weight	5600KG	5800KG
油箱容量 Fuel Tank	246L/332L	246L/332L

180-260HP Model

马力拖拉机



产品底盘代号：TG & TS

Series Code: G & S

- 型号：QL1804(G)/QL2104(G)/QL2204(G)/QL2404(G)/QL2604(S)

  Model: QL1804(G)/QL2104(G)/QL2204(G)/QL2404(G)/QL2604(S)

- 该系列底盘可匹配180-260马力区间，加厚壳体，承载力强

  *This series match 180-260HP, chassis is larger and more stable

- 所有齿轮采用斜齿啮合结构，不易打齿，啮合更平稳，传动效率更高

  *Helical gear meshing structure, meshing more smoothly

- TG 16+16变速箱，选配32+32爬行档，适应不同作业工况

  *16F+16R shuttle shift with synchronizer, optional 32F+32R shift

- 440L加大主副双油箱，满足长时间作业需求，提高工作效率

  *440L fuel tank extends working time and improves work efficiency

- 刹车系统使用液压盘刹，制动力大，抗热衰退性能强，操作简便

  *Hydraulic disc brake, large braking force, strong resistance to thermal decay

Engine

发动机





- 选取国内名牌发动机，标配潍柴，可选玉柴、上柴、东方红等品牌，品控有保障

  *Standard Weichai Brand, optional Yuchai/YTO/Shangchai brand

- 动力强，动力储备≥20%；扭矩大，扭矩储备25%-30%

  *Power reserve ≥ 20%, torque reserve 25%-30%, more powerful

- 沙漠型空滤器，清洁型强，性能更先进，不惧恶劣环境和高负荷工作

  *Desert air filter with more advanced performance

- 涡轮增压或增压中冷式进气方式，用户可根据作业环境来选配

  *Turbocharged or intercooled, choose according to the working environment

- LUK牌17寸湿式双作用离合器，传动效率高，减少换挡冲击度

  *LUK brand 17-inch wet type dual stage clutch, reduces shifting shock

Front Axle

前驱动桥





- 采用万向节驱动轴，传递扭矩大，可靠性高

  *Using universal joint drive shaft, large transmission torque and high reliability

- 内部结构包括四级减速，边减为双锥及行星减速，中央传动可选配差速锁

  *Four-stage reduction, optional differential lock for central transmission

- 中置油缸，独立油路全液压转向，左右转向半径一致，转向角≤50°

  *Center-mounted cylinder, Independent oil circuit fully hydraulic steering, steering angle ≤ 50°

- 多系列的传动比更灵活的满足不同客户需求

  *Multiple transmission ratios to meet diverse customer needs

- 最大承载力≤2600KG，坚固耐用，负载能力强

  *Max.load capacity ≤ 3300KG, strong and sturdy

Rear Working System

后工作装置





- 液压三点悬挂3类，带有快速挂接装置

  *Hydraulic 3-point hitch cat III with quick hitch

- 标配3组液压输出，可选电控液压系统

  *Standard 3 pair hydraculic output, optional electronically controlled hydraulic system

- 标配U型拖挂，可选择摆式牵引用于拖车和其他牵引类机具

  *U type traction, optional swing drawbar, use for trailer

- PTO转速可选540/1000或760/1000，6键输出轴，对标国际标准

  *PTO Speed 540/1000 or 760/1000, Ø35, 6 Rectangular Spline

- 道依茨同款大业牌齿轮泵，半分置式液压系统，液压流量60L

  *DAYE brand gear pump, hydraulic flow 60L

Driving Position

驾驶台





- 航空级加宽气垫座椅，舒适性、安全性更高

  *Aviation-grade air cushion seat, wider cushion, higher comfort

- 可选360度行车影像，减少视野盲区，提升驾驶安全性

  *Optional 360° driving camera reduce blind spots and improve driving safety

- 液压助力离合踏板，减轻驾驶员脚部负担，降低驾驶疲劳

  *Hydraulic clutch pedal reduces driving fatigue

- 侧置独立手刹，驻车效果更好，安全性更高

  *Independent handbrake, better parking effect and higher safety

- 车内静音设计，添加隔音材料，密封性优良

  *Silent interior design, added sound insulation materials, and excellent sealing

Common Engine Hood Style

常用机罩样式



1. 中远大黄蜂1号 *ZYZKION Hornet No.1
2. 中远大黄蜂2号 *ZYZKION Hornet No.2
3. 中远大黄蜂3号 *ZYZKION Hornet No.1
4. 中远大黄蜂1X *ZYZKION Hornet No.1X



Optional Tire Type

可选轮胎款式

1. 平花胎 *R-1, Flat pattern tire
2. 农业子午胎 *R-1W, Radial Tire

Parameter

180-260HP参数表

型号 Model	QL1804(G)	QL2104(G)	QL2204(G)
动力 Power	180马力/132.3千瓦 180HP/132.3KW	210马力/154.4千瓦 210HP/154.4KW	220马力/161.8千瓦 220HP/161.8KW
驱动 Wheel Drive	4×4	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	5650*2450*3300mm	5650*2450*3300mm	5650*2450*3300mm
标准档位 Grar Shift	16+16同步器梭式换挡 16F+16R Shuttle Shift With Synchronizer	16+16同步器梭式换挡 16F+16R Shuttle Shift With Synchronizer	16+16同步器梭式换挡 16F+16R Shuttle Shift With Synchronizer
离合器 Clutch	湿式双作用离合 Wet type, Dual stage	湿式双作用离合 Wet type, Dual stage	湿式双作用离合 Wet type, Dual stage
标准轮胎 Standard Tire R-1	16.9-28/20.8-38	16.9-28/20.8-38	16.9-28/20.8-38
选配轮胎 Optional Tire R-1	16.9-28/20.8-42, Dual rear wheel	16.9-28/20.8-42, Dual rear wheel	16.9-28/20.8-42, Dual rear wheel
动力输出 PTO	540/1000 或 760/1000 540/1000 or 760/1000	540/1000 或 760/1000 540/1000 or 760/1000	540/1000 或 760/1000 540/1000 or 760/1000
重量 Weight	7300KG	7300KG	7300KG
油箱容量 Fuel Tank	440L	440L	440L

型号 Model	QL2404(G)	QL2604(S)
动力 Power	240马力/176.5千瓦 240HP/176.5KW	260马力/191.2千瓦 260HP/191.2KW
驱动 Wheel Drive	4×4	4×4
尺寸（长×宽×高） Dimension (L×W×H)	5650*2450*3300mm	5750*2520*3300mm
标准档位 Grar Shift	16+16同步器梭式换挡 16F+16R Shuttle Shift With Synchronizer	16+16同步器梭式换挡 16F+16R Shuttle Shift With Synchronizer
离合器 Clutch	湿式双作用离合 Wet type, Dual stage	湿式双作用离合 Wet type, Dual stage
标准轮胎 Standard Tire R-1	16.9-28/20.8-38	16.9-28/20.8-38
选配轮胎 Optional Tire R-1	16.9-28/20.8-42, Dual rear wheel	16.9-28/20.8-42, Dual rear wheel
动力输出 PTO	540/1000 或 760/1000 540/1000 or 760/1000	540/1000 或 760/1000 540/1000 or 760/1000
重量 Weight	7600KG	8100KG
油箱容量 Fuel Tank	440L	440L

02

CUSTOMIZED TRACTOR MODELS
定制机型

- 大棚&果园拖拉机 Garden&Orchard Tractor
- 欧五排放拖拉机 Euro V Emission Model
- 工程轮胎拖拉机 Industrial Tire Model

Garden &Orchard Tractor

大棚&果园拖拉机





型号：QL504G　　Model: QL504G

- *专为大棚、果园、葡萄园等地形开发，可适配25-80马力，QL504G最为畅销
  *Suitable for greenhouse, orchard, vineyard, adapt to 25-80hp, QL504G is the best-selling model
- *具有轴距段、转弯半径小的特点，在狭小的空间内动作灵活方便
  *Short wheelbase, small turning radius, flexible and convenient movement in small spaces
- *配备全液压转向系统和液压提升系统，适应任何软硬不一的地块
  *Fully hydraulic steering and lifting system, 1 pair hydraulic output
- *下置排气设计，降低整体高度，避免了剐蹭果树
  *Exhaust pipe below, reduce the height, avoid scratching the fruit trees
- *8F+2R中置变速箱，挂档轻便灵活，降低操作疲劳
  *8F+2R mid shift, light and flexible shifting, reducing operating fatigue
- *标配1组液压输出，可挂接小型液压机具
  *1 group hydraulic output, connect to small hydraulic implements
- *后置液压提升器，用于较硬地块的犁垦
  *Rear-mounted hydraulic lift for plowing on harder soil
- *液压助力方向盘，转向轻便，易维护保养
  *Hydraulic power-assisted steering wheel, light steering and easy maintenance
- *加宽脚踏板，获得更多的腿部放置空间
  *Widen the footrests for more leg space
- *可选装迷你前端装载机，200KG额定载重，十分适合小庄园装卸作业
  *Optional mini front end loader, rated lift capacity 200KG

Parameter

QL504G参数表

型号 Model	动力 Power	尺寸（长×宽×高） Dimension (L×W×H)	标准档位 Grar Shift	离合器 Clutch	标准轮胎 Standard Tire R-1	选配轮胎 Optional Tire R-1	动力输出 PTO	重量 Weight	油箱容量 Fuel Tank
QL504G	50马力/36.8千瓦 50HP/36.8KW	2780*1260*1220mm	8+2档 8F+2R Shift	单作用离合 Single stage	6.0-12/9.5-16	7.0-12/13.6-16	540/720	1410KG	35L

Euro V Emission Model

欧五排放拖拉机





型号：QL504(B)/QL754(B)　Model: QL504(B)/QL754(B)

- *搭配新柴欧五发动机，马力匹配 50-75HP
  *Xinchai Euro Stage V engine, from 50HP to 75HP
- *12F+12R 同步器换挡变速箱，换挡轻柔，冲击感小
  *12F+12R synchronizer shift with small shifting impact
- *前后子午线轮胎，抗磨、耐刺孔、使用寿命长
  *Front and rear radial tire, anti-wear, puncture-resistant, long service life
- *瓦尔塔 120A 蓄电池，启动电流稳定，耐腐蚀性强
  *Varta 120A battery, stable starting current, strong corrosion resistance
- *四合一前端装载机，最大举升力 800KG
  *Add 4 in 1 front end loader, max. lift capacity 800KG
- *帅客豪华空调驾驶室，超大全景视野，密闭静音设计
  *Luxury air-conditioner cab, large panoramic view, airtight and silent design
- *右侧集成式控制台，操作简便，响应灵敏
  *Integrated console on the right, easy to operate and responsive
- *驾驶室结构经过 OECD 认证，安全性能出众，保障操作人员安全
  *Whole structure passed OECD, E-mark rear taillight
- *配备 4 个倒车摄像头，带有传感雷达，可触发障碍物警报
  *Four reverse cameras with sensing radar that can trigger obstacle alerts
- *进口格拉默座椅，真皮面料，气囊减震，舒适性、安全性出色
  *Grammer seats, leather fabric, air bag shock absorption, excellent comfort and safety
- *充满高科技感的高清数码显示屏，功能更丰富
  *High-tech high-definition digital display with richer functions

Euro V Emission Model

欧五排放拖拉机



- *3点悬挂1类或2类，610mm处最大提升力1200KG

  *3 Point hitch CAT I or II, Max. 1200KG lift capacity at 610mm

- *外置提升器控制杆，仅需一人即可操作挂接农机具

  *External lift control lever, single person can operate the mounted implements

- *双牵引，同时安装 U 型拖挂与摆式牵引，适用更多工作场景

  *U type and swing drawbar both, suitable for more working scenarios

- *双边限位油缸，避免过载磨损，保证安全的工作范围

  *Limit cylinder to avoid overload wear and ensure a safe working range

- *选择国内优质多路阀，具备更精准的油量控制和压力控制

  *China high quality multi-way valves with more precise oil volume control and pressure control

Parameter

QL504(B)/QL754(B)参数表

型号 Model	QL504(B)	QL804(B)
动力 Power	50马力/36.8千瓦 50HP/36.8KW	75马力/55.2千瓦 75HP/55.2KW
尺寸（长×宽×高） Dimension (L×W×H)	3870*1900*2700mm	3870*1900*2700mm
标准档位 Grar Shift	12+12档 12F+12R Shuttle Shift	12+12档 12F+12R Shuttle Shift
离合器 Clutch	双作用离合 Dual stage	双作用离合 Dual stage
标准轮胎 Standard Tire R-1	280/85R20, 380/85R30	280/85R20, 420/85R28
选配轮胎 Optional Tire R-1	9.5-20/14.9-28	9.5-24/14.9-30
动力输出 PTO	540/1000	540/1000
重量 Weight	2700KG	2950KG
油箱容量 Fuel Tank	70L	70L

Industrial Tire Model

工程轮胎拖拉机





型号：QL354(E)/QL504(E)　　Model: QL354(E)/QL504(E)

- *弹簧式机罩锁，打开机罩仅需一秒，省时又省力
  *Spring-type hood lock, only takes one second to open the hood
- *前后轮胎使用农业工程胎，承载力、抓地力、抗磨损性远高于平花胎
  *Front and rear industrial tires, grip and wear resistance are much higher than flat tires
- *内置型干式空滤器，节省侧面空间，更便于改装前装载
  *Built-in dry air filter saves side space, easier to add front loader
- *前装载举升重量 300-400KG，大臂表面喷塑，抗磨耐腐蚀，色泽明亮
  *Front loader lift capacity 300-400KG, surface sprayed plastic, wear and corrosion resistant, bright colors
- *配备机械欧式快换连接，可更换四合一铲斗、托盘叉、推石铲等
  *Mechanical Euro quick hitch, optional 4 in 1 bucket, pallet forks, stone bucket etc
- *8F+8R 梭式换挡，前进后退切换自如，更适合国外的操作习惯
  *8F+8R shuttle shift, forward and backward switching freely
- *人性化设计，额外安装上车扶手架，安全、舒适、便捷
  *Humanized design, additional handrails, safe, comfortable and convenient
- *加宽坐垫减震座椅，弹簧刚度可调，不同路况下的适应性更强
  *Widened cushion shock-absorbing seat, better vibration filtering
- *侧置主副变速杆，预留更大的腿部空间，挂挡舒适
  *Side gear levers allow for more leg space and comfortable gear shifting
- *内嵌式燃油箱，减少了在恶劣环境中工作时被碰撞的风险
  *Built-in fuel tank reduces the risk of collision during work

Industrial Tire Model

工程轮胎拖拉机



- *一体式组合仪表盘，指示灯更多，车辆状态信息展示更清晰

  *Integrated instrument panel with more indicator lights

- *加粗型壳体，负载能力出色，最大承载力可达 1000KG

  *Thickened shell, excellent load capacity, maximum load capacity up to 1000KG

- *前轮液压转向，独立液压油路，转向灵活轻便

  *Full hydraulic steering of the front wheels, with independent hydraulic circuit, flexible and light steering

- *50°大转向角，减少转弯半径

  *50° large steering angle, reduced turning radius

- *骆驼牌 80A 蓄电池，性能稳定，节能型好

  *80A lead-acid battery, no daily maintenance required, stable performance

Parameter

QL354(E)/QL504(E)参数表

型号 Model	QL354(E)	QL504(E)
动力 Power	35马力/25.7千瓦 35HP/25.7KW	50马力/36.8千瓦 50HP/36.8KW
尺寸（长×宽×高） Dimension (L×W×H)	3450*1450*2200mm	3450*1450*2200mm
标准档位 Grar Shift	8+8档 8F+8R Shuttle Shift	8+8档 8F+8R Shuttle Shift
离合器 Clutch	双作用离合 Dual stage	双作用离合 Dual stage
标准轮胎 Standard Tire R-1	10-16.5, 15-19.5	10-16.5, 15-19.5
动力输出 PTO	540/720	540/720
重量 Weight	1750KG	1800KG
油箱容量 Fuel Tank	35L	35L

02

ATTACHMENT & IMPLEMENTS
附件&农机具

A 前装载附件 Loader Attachment

- 前端装载机 Front End Loader
- 反铲挖掘机 Backhoe
- 托盘叉 Pallet Fork
- 抓木叉 Log Grab
- 推土机 Bulldozer
- 草叉 Hay Frok
- 抱草夹 Bale Cilp

B 农机具 Tractor Implements

- 圆盘犁 Disc Plough
- 圆盘耙 Disc Harrow
- 甩刀割草机 Slasher Mower
- 连枷割草机 Flail Mower
- 打捆机 Baler
- 圆盘割草机 Disc Mower
- 旋耕机 Rotary Tiller
- 铧式犁 Furrow Plow
- 液压翻转犁 Flip plow
- 中耕机 Cultivator
- 深松机 Subsoiler
- 拖车 Dump Trailer
- 气吸播种机 Pneumatic seeder
- 送风式喷雾器 Blown Sprayer

Front End Loader
前端装载机



*产品可搭配25-260马力不同底盘的拖拉机，举升重量300-1600KG

*Match tractors with different chassis of 25-260hp, lift capacity 300-1600KG



*高性能液压泵阀，操作响应灵敏，传动过程流程

*High-performance hydraulic pump, sensitive operation response and smooth transmission



*可用软轴控制杆，操作系统更集中，易维护；柔韧性好，冲击力小

*The flexible shaft control rod can be used, the operating system is more centralized and easy to maintain; it has good flexibility and small impact force



*旋转处均带有润滑点，可从外部加注润滑脂，降低磨损

*With lubrication points at all rotating parts, and grease can be added from the outside to reduce wear



*强劲的动臂油缸，提升力作用点在最佳位置，提供强大的提升能力

*The powerful boom cylinder places the lifting force at the best position, providing strong lifting capacity





*自选机械欧式快换和液压欧式快换，标准统一，适配面广

*Optional mechanical Euro quick hitch or hydraulic Euro quick hitch

Parameter

QL354(E)/QL504(E)参数表

型号 Model	单位Unit	TZ03D	TZ04D	TZ06D	TZ08D	TZ10D	TZ12D	TZ16D
举升重量 Rated lift capacity	kg	300	400	600	800	1000	1200	1600
举升高度 Max.dump height	mm	1800	2000	2200	2350	2600	2800	3200
挖掘深度 Digging depth	mm	100	120	140	180	180	200	200
铲斗容量 Bucket capacity	m^3	0.18	0.3	0.4	0.48	0.6	1	1.4
举升速度 Lifting time to pivot pin	s	42-45	42-45	42-45	42-45	42-45	42-45	42-45
降落速度 Descending time	s	7	7	7	8	8	10	10
倾卸角 Dump angle	°	3.5	3.5	3.5	4	4	5	5
重量 Weight	kg	500	580	680	770	840	940	1080

Backhoe

反铲挖掘机



*产品适用于所有带有标准三点悬挂和PTO输出轴的拖拉机

*Compatible with all tractors featuring a standard three-point hitch and PTO shaft



*一体式齿轮泵，内花键6键或8键，免加液压油，维护方便

*Integrated gear pump, 6 or 8 splines, no need to add hydraulic oil, easy maintenance



*高精度液压控制阀，独立液压油箱，操作平稳易上手

*High-precision hydraulic control valve, independent hydraulic tank, smooth and easy to operate



*高性能液压泵阀，操作响应灵敏，传动过程流畅

*High-performance hydraulic pump, sensitive operation response and smooth transmission

Parameter

Backhoe参数表

型号 Model	单位Unit	LW-6	LW-7	LW-8	LW-10	LW-12
配套马力 Matching Tractor	HP	24-50	55-70	70-100	90-130	130-180
最大挖掘深度 Max.Digging Depth	mm	1700	2100	2600	3000	3600
最大卸载高度 Max.Unloading Height	mm	1700	2300	2500	2640	3200
最大挖掘高度 Max.Digging Height	mm	2700	3300	3400	4000	4500
最大平底挖掘深度 Max.Digging Depth Flat Bottom	mm	1600	2000	2500	2800	3500
最大摆动角度 Maximum Swing Angle	°	180	180	180	180	180
铲斗转角 Bucket Rotation Angle	°	160	160	160	160	174
铲斗容量 Bucket Capacity	m^3	0.03	0.036	0.048	0.06	0.08
重量 Weight	kg	450	500	540	780	1200

Pallet Fork

托盘叉

使用 DT 型托盘叉可快速轻松地移动托盘、袋装或大件材料。手动调节叉可在各种作业现场装载和卸载、提升和搬运、移动和放置材料，提高工作效率，节省劳动力成本。适用于工业厂房和景观美化工作、建筑工地、农务和肥料处理。

Move palletized, bagged or bulky material quickly and easily with the Pallet Fork DT. Manually adjustable forks load and unload, lift and carry, move and place materials around a variety of jobsites, Save time and labour costs. Suited for industrial plant and landscaping work, construction sites, farm operations and fertilizer handling.



Parameter

Backhoe参数表

型号 Model	单位Unit	DT04	DT06	DT10
配对前装载 Matched Loader	/	TZ03/04	TZ06/08	TZ10/12
叉齿规格 Fork Dimenssion	mm	800*75*35	100*75*35	110*100*35
支架宽度 Bracket width	mm	1130	1230	1260
托举重量 Load capacity	kg	400	600	1000
自重 Weight	kg	125	145	165

Pallet Fork

托盘叉

该抓木叉非常适合提升圆木、枕木和其他长而重的物体。当像托盘叉一样装载时，连接臂会抓住负载的中心，以确保其安全。叉臂用于托盘叉附件，这意味着它增加了承载表面积。叉齿磨损后也可以轻松拆卸和更换。

This grapple is ideal for lifting logs, ties, and other long, heavy objects. When loaded like a pallet fork, the connecting arm grips the center of the load to keep it secure. The wishbone is used for pallet fork attachments, which means it increases the load-bearing surface area. The fork tines can also be easily removed and replaced when worn.



Bulldozer/Snow Blade

推土铲/推雪铲

该铲刀可胜任建筑工地的碎石清理、冬季除雪、平整土地等工作。铲刀背面的跳闸弹簧可缓冲意外碰撞阻力，直推刀可通过加装两侧液压油缸实现左右 0°~30° 摆动。刀片带有自动调平功能，以适应不平坦的路面。

This blade can be used for gravel clearing at construction sites, snow removal in winter, land leveling and other tasks. The trip spring on the back of the blade can buffer accidental collision resistance. It can swing from left to right by 0°~30° by adding hydraulic cylinders on both sides. The blades come with a self-leveling feature to adapt to uneven surfaces.



Parameter

Log Grab参数表

型号 Model	单位Unit	LG04	LG06	LG10
配对前装载 Matched Loader	/	TZ03/04	TZ06/08	TZ10/12
叉齿长 Fork length	mm	1100	1200	1220
支架宽度 Bracket width	mm	1100	1200	1220
抓取直径 Grabbing bale dia.	mm	100-600	100-750	150-950
举升重量 Load capacity	kg	400	600	800--1000
自重 Weight	kg	180	220	260

Parameter

Bulldozer/Snow Blade参数表

型号 Model	单位Unit	TT150	TT160	TT180	TT210	TT230
配对前装载 Matched Loader	hp	TZ03	TZ04	TZ06/08	TZ10	TZ12
宽度 Working Width	mm	1500	1650	1850	2100	2300
铲斗倾斜角 Swing Angle	°	0/0,16,30	0/0,16,30	0/0,16,30	0/0,16,30	0/0,16,30
铲起角度 Shoveling Angle	°	60	60	60	60	60
最大推土深度 Max.Dozing Depth	mm	100	120	130	130	130
重量 Weight	kg	250	270	350	380	430

Hay Forks

草叉

双齿干草叉可用于大型方草捆和圆草捆，在平坦的一侧刺穿草捆，可通过叉齿滑动在草捆下方提供支撑，从而将草捆牢固地固定到位。双叉齿固定，在堆叠或搬运时草捆不会旋转。可选顶部第三叉齿，三角叉提供更为稳定的固定效果。

Double-tine hay fork are available for large square and round bales, piercing the bale on the flat side and providing support underneath the bale by sliding the tines to hold the bale securely in place. The double tines are fixed so the bales will not rotate when stacking or handling. The third tine on the top is optional, and the triangular fork provides a more stable fixing effect.



Bale Grab

抱草夹

经过充分验证的设计和较低的净重，适合中小型的圆形草捆。机具臂将压力均匀分布，确保夹抱草捆时的稳定性。夹持臂由大直径管制成，没有锋利边缘或焊接接头，有效防止损坏捆包的塑料薄膜。

Well-proven design and low net weight, suitable for small to medium round bales. The machine arm distributes pressure evenly to ensure stability when clamping bales. The clamping arms are made from large diameter tubing with no sharp edges or welded joints, effectively preventing damage to the bale's plastic film.



Parameter

Hay Fork参数表

型号 Model	单位Unit	DL05A	DL10A	DL05B	DL10B
配对前装载 Matched Loader	Unit	DL05A	DL10A	DL05B	DL10B
叉齿长 Fork length	mm	800	230	60/80	80/120
叉齿直径 Tine Dia.	mm	40	60	25/40	40/60
支架宽度 Bracket width	mm	1200	1200	1200	1200
重量 Weight	kg	200	500	200	500

Parameter

Hay Fork参数表

型号 Model	单位Unit	DK05	DK10	DK12
配对前装载 Matched Loader	/	TZ03/04	TZ06/08	TZ10/12
抱捆直径 Grabbing bale dia.	mm	500-1200	600-1600	900-2100
抱捆重量 Grabbing weight	kg	400	750	1250
抓取直径 Grabbing dia.	mm	100-800	150-950	400-1350
自重 Weight	kg	180	220	300

Disc Plough Parameter

圆盘犁







圆盘犁是与拖拉机全悬挂连接配套，作业时犁片旋转运动，对土壤进行耕翻作业。具有不缠草，不阻塞，不壅土，能够切断作物茎杆、根茎，工作阻力较小等优于锋式犁的特点，特别适用于杂草丛生，茎杆林立，土壤比阻较大，土壤中有砖石碎块等条件复杂农田的耕地作业。

The disc plough is matched with a tractor via full suspension connection. During operation, the discs rotate to turn over the soil. It has advantages over mouldboard ploughs, such as no grass wrapping, no clogging, no soil accumulation, the ability to cut crop stalks and roots, and lower working resistance. It is especially suitable for tilling farmland with complex conditions, such as overgrown weeds, dense stalks, soil with high specific resistance, and the presence of bricks and stones.

Light Duty Disc Plough参数表

型号 Model	1LYQ-220	1LYQ-320	1LYQ-420	1LYQ-520
耕幅 Width of cut (mm)	400	600	800	1000
耕深 Depth of cut (mm)	200			
犁片直径 Dia of disc (mm)	510			
犁片数量 Q'ty of disc	2	3	4	5
重量 Weight (kg)	140	190	240	300
配套马力 Tractor power (hp)	20-25	25-40	40-70	50-75
悬挂类别 Mounted cat	3 point cat I	3 point cat I	3 point cat I	3 point cat II

Heavy Duty Disc Plough参数表

型号 Model	1LYX-230	1LYX-330	1LYX-430	1LYX-530
耕幅 Width of cut (mm)	600	900	1200	1500
耕深 Depth of cut (mm)	250-300			
犁片直径 Dia of disc (mm)	660			
犁片数量 Q'ty of disc	2	3	4	5
重量 Weight (kg)	300	440	490	550
配套马力 Tractor power (hp)	55-60	65-75	80-100	120-130
悬挂类别 Mounted cat	3 point cat II			

Disc Harrow Parameter

圆盘耙



按照重量和悬挂方式可分为悬挂轻耙和牵引重耙，悬挂轻耙主要适用于农田的耕后碎土、播前整地、疏松土壤、土肥混合和轻质土壤的灭茬作业。液压牵引重耙对粘重土壤、荒地和杂草多的地块具有很强的耕作能力，主要适用于农田耕前灭茬，破除地表板结，秸杆切碎还田，耕后碎土，平整保墒等项工作，重型圆盘耙在熟地上亦可代替犁进行土壤耕翻作业。

According to the weight and connect method, it can be divided into suspended light duty disc harrow and traction heavy duty disc harrow. The light duty disc haaow is mainly suitable for crushing soil after plowing, preparing soil before sowing, loosening soil, mixing soil and fertilizer, and stubble removal. Heavy duty disc harrow have strong farming capabilities for heavy clay soil, wasteland and plots with lots of weeds. They are mainly suitable for clearing stubble before farming, breaking surface hardening, cutting straw and returning it to the field, breaking soil after tilling, and leveling to preserve moisture.

Light Duty Disc Harrow参数表

型号 Model	1BQX-1.1	1BQX-1.3	1BQX-1.5	1BQX-1.7	1BQX-1.9	1BQX-2.2
耕幅 Width of cut (mm)	1100	1300	1500	1700	1900	2200
耕深 Depth of cut (mm)	120					
犁片直径 Dia of disc (mm)	460					
犁片数量 Q'ty of disc	12	14	16	18	20	24
重量 Weight (kg)	200	220	240	260	310	360
配套马力 Tractor power (hp)	18-24	20-25	25-30	35-50	50-60	55-70
悬挂类别 Mounted cat	3 point cat I	3 point cat I	3 point cat I	3 point cat I	3 point cat I	3 point cat II

Heavy Duty Disc Harrow参数表

型号 Model	1BZ-1.8	1BZ-2.2	1BZ-2.5	1BZ-3.0	1BZ-3.4	1BZ-4.0
耕幅 Width of cut (mm)	1800	2200	2500	3000	3400	4000
耕深 Depth of cut (mm)	200					
犁片直径 Dia of disc (mm)	660					
犁片数量 Q'ty of disc	16	20	24	28	32	36
重量 Weight (kg)	1160	1350	1500	1600	1900	2300
配套马力 Tractor power (hp)	70-80	80-90	90-100	100-110	110-120	140
悬挂类别 Mounted cat	3 point cat II					

Slash Mower Parameter

甩刀割草机







9GX系列甩刀型割草机主要适用于草场、灌木林地的割草、清理以及地表不平整牧场的更新、改造等作业。该系列割草机利用偏置式曲柄连杆机械机构驱动刀片进行割草作业，带有过载保护，可调节割草高度。

9GX series slasher mower are mainly suitable for mowing and cleaning pastures and shrublands, as well as the renewal and re-construction of uneven pastures. This series of lawn mowers use an offset crank-link mechanical mechanism to drive the blade for mowing operations. With overload protection and adjustable cuttinf height.

Slasher Mower参数表

型号 Model	9GX-1.0	9GX-1.2	9GX-1.5	9GX-1.8	9GX-2.1	9GX-3.0
耕幅 Width of cut (mm)	1000	1200	1500	1800	2100	3000
割茬高度 Height of cut (mm)	10-30					
转速PTO speed (r/min)	540/720					
重量 Weight (kg)	235	280	335	380	440	600
配套马力 Tractor power (hp)	25-30	30-40	40-60	70-80	90-100	100-120
悬挂类别 Mounted cat	3 point cat I	3 point cat I	3 point cat I	3 point cat II	3 point cat II	3 point cat II

Flail Mower Parameter

连枷割草机



翻转侧移连枷割草机，可更高覆盖率的完成碎草及碎枝作业，粉碎效果更加细腻。能方便的调整留茬高度。具有多项作业安全防护机制，可自调平衡。液压调控机身侧移及翻转，变换割草位置。能够伸到树冠下，进入沟渠，在路边以及其他拖拉机不适合或无法安全行驶的地方进行作业。

This flail mower is able to shred grass, straw and branches with higher coverage, and the shredding effect is more delicate. It can easily adjust the stubble height, and can shred grass roots. It also has a number of operational safety protection mechanisms and self-adjusting balance. It has hydraulic control of slide and flip to change mowing position. It reaches under branches, enters ditches, works on roadsides and other places where tractors are not suitable or cannot drive safely.

Flail Mower参数表

型号 Model	AGL-120	AGL-140	AGL-160	AGL-180
尺寸 Diemension (mm)	1350*800*750	1550*800*750	1750*800*750	1950*800*750
重量 Weight (kg)	303	318	336	355
割幅 Cutting width (mm)	1150	1350	1550	1750
转速PTO Speed (r/min)	540			
锤刀数量 Hammer blades (pcs)	18	22	24	28
翻转角度 Angle (°)	-45 - +90			
刀轴转速 Rotor Speed (r/min)	2160			

Round Baler

圆形打捆机







圆形捡拾打捆机主要通过捡拾机构、卷压滚筒机构、扎线机构和放捆机构自动完成物料的(稻、麦秸秆、牧草等)的捡拾、成型、打捆和放捆过程。草捆成形后，通过拖拉机自带的液压机构控制油缸，将后机架打开，吐出草捆。自动化程度高，节省人工劳动力。

The round baler mainly automatically completes the picking, shaping, bundling and bundling process of materials through the picking mechanism, rolling roller mechanism, wire binding mechanism and bundling mechanism. After the bale is formed, by tractor's own hydraulic cylinder to open the rear frame and spit out the bale.

Square Baler

方形打捆机







方形打捆机自带草捆密度控制器，可手动调节草捆的密度和草捆尺寸自动捡拾草料，通过输送喂入、再压缩成形、最后打结捆扎吐出草捆。在飞轮前段装有滑动摩擦离合器，超载时离合器将瞬时滑转，以保护机器免受损坏。

The square baler is equipped with a bale density controller, which can manually adjust the density and size of the bale, automatically pick up the forage, feed it through conveying, then compress and form it, and finally knot and tie it and spit out the bale. Add sliding friction clutch in the front section of the flywheel. When overloaded, the clutch will instantly slip to protect the machine from damage.

Parameter

Round Baler参数表

型号 Model	9YK8050	9YK8070	9YK9010
捡拾宽度 Pick up width (mm)	800	800	1000
滚筒转速 Weight (r/min)	192.9	200	200
外形尺寸 Dimensions (L*W*H)	1150*1300*1200	1300*1300*1350	1500*1350*1300
包装尺寸 Packaging size (L*W*H)	1150*1100*1100	1250*1100*1150	1450*1200*1200
配套马力 Supporting power (HP)	25-50	25-50	30-90
转速 PTO speed (r/min)	540	540	540
草捆尺寸（直径*宽度） Bale size (mm)	500*700	630*700	630*950
打捆重量 Baling weight (kg)	20-30	25-30	25-35
作业速度 Working speed (Km/h)	2-5	2-5	5-8
生产率 Productivity (Kg/h)	1500-3000	1500-3000	1500-3000
草捆密度 Density (kg/m³)	> 115	> 115	> 115
成捆率 Bundle rate (%)	> 98	> 98	> 98
整机重量 Machine weight (kg)	390	440	550

Square Baler参数表

型号 Model	9YF-2.2
外形尺寸 Dimensions (L*W*H)	4600*2860*1750
整机重量 Machine weight (kg)	1680
捡拾宽度 Pick up width (mm)	2230
配套拖拉机功率 Matched power (HP)	> 50
与拖拉机连接方式 Connect method	3 point cat I
牵引形式 Traction form	Mid-mounted
PTO转速 PTO speed (r/min)	540
打结器数量 No.of knotters	2 pcs
草捆尺寸（直径*宽度） Bale size (mm)	360*440
草捆长度 Bale length (mm)	500-1350
草捆密度 Density (kg/m³)	120-180

Disc Mower Parameter

圆盘割草机



根据刀盘数量分为双圆盘式与多圆盘式，主要用于对各类畜牧草的收割，例如紫花苜蓿、黑麦草、燕麦草等。圆盘式割草机具有较高的工作效率，比往复式割草机更适合于切割较高大的作物。刀杆装有螺旋手柄及双弹簧悬挂装置，容易升降，能适应地面的凹凸情况，不损伤草地。本机装有过载保护装置，作业中碰上障碍物或遇异常力时，割草盘往后移动，使主机免受连续损伤。多圆盘割草机还配备德国舒马赫刀片，耐磨性和锋利性更强。

According to the number of cutter discs, they can be divided into double-disc and multi-disc types, which are mainly used for harvesting various types of livestock grasses, such as alfalfa, ryegrass, oatgrass, etc. The disk type mower has a higher working efficiency than the reciprocating type, and is more suitable for cutting taller crops. The cutter bar is equipped with a spiral handle and a double spring suspension device, which is easy to adjust in height and can adapt to the undulating ground without damaging the grass. The machine is equipped with an overload protection device. When encountering obstacles or abnormal forces during operation, the cutter disc moves backward, protecting the main machine from continuous damage. The multi-disc mower is also equipped with German Schumacher blades, which have stronger wear resistance and sharpness.

Disc Mower参数表

型号 Model	DM135	DM165	DM185
耕幅 Width of cut (mm)	1350	1650	1850
割茬高度 Height of cut (mm)	30		
转速PTO speed (r/min)	540		
圆盘数量 No.of disc	2 pcs		
配套马力 Tractor power (hp)	≥30	≥45	≥60
重量 Weight (kg)	350	400	440
悬挂类别 Mounted cat	3 point cat II		

Multi-Disc Mower参数表

型号 Model	YS1670	YS2050	YS2450	YS2860	YS3200
耕幅 Width of cut (mm)	1670	2050	2450	2860	3200
圆盘数量 No.of disc	4 psc	5 psc	6 psc	7 psc	8 psc
圆盘转速 Disc speed (r/min)	2900				
PTO转速 speed (r/min)	540				
刀片品牌 Blade brand	Grman Schumacher				
圆盘切割直径 Disc cutting dia. (mm)	500				
行进速度 Travel speed (km/h)	4-12				
配套马力 Tractor power (hp)	70-85	80-90	90-110	110-130	140-160
重量 Weight (kg)	436	485	590	629	707
悬挂类别 Mounted cat	3 point cat I or II		3 point cat II		

Rotary Tiller Parameter

旋耕机



中置旋耕机主要配套拖拉机后PTO轴，它是利用刀轴上刀片的旋转和前进的复合运动对未耕地和已犁过的天地进行碎土作业，其性能特点是碎土能力强，一次旋耕能达到一般犁耙几次的效果。主要适用于沙壤土、壤土、轻粘土等旱田作业土壤绝对含水率在15%-25%之间的农田的旱耕、灭茬除草、翻压覆盖施肥、蔬菜田整地等作业。

This rotary tiller is mainly designed to be coupled with PTO. It utilizes the compound movement of the rotating blades on the shaft and the forward movement to perform soil crushing operations on untilled and tilled lands. The main performance feature is its strong soil crushing ability. Suitable for sandy loam, loam, light clay, and other dry field soil types with an absolute water content of 15%-25%. Mainly used for dry farming, stubble removal, fertilizer application, soil covering, and vegetable field preparation.

Rotary Tiller参数表

型号 Model	1GQN-110	1GQN-125	1GQN-140	1GQN-150
耕幅 Working of width (mm)	1100	1250	1400	1500
耕深 Working of depth (mm)	120-160			
刀片数 No.of blades (pcs)	22	26	30	34
刀片型号 Blade type	IT225			
转速PTO Speed (r/min)	540/720			
重量 Weight (kg)	172	178	186	192

型号 Model	1GQN-160	1GQN-180	1GQN-200	1GQN-220
耕幅 Working of width (mm)	1600	1800	2000	2200
耕深 Working of depth (mm)	120-160	120-180		
刀片数 No.of blades (pcs)	38	48	58	62
刀片型号 Blade type	IT225		IT245	
转速PTO Speed (r/min)	540/720			
重量 Weight (kg)	221	349	363	375

Furrow Plow — Parameter

铧式犁



1L系列铧式犁适用于土壤比阻0.8-1公斤/厘米以下的水旱耕翻作业。既能满足正常耕深要求，又能满足逐步加深耕作层的农艺要求（最高可达30厘米）。采用全悬挂形式，整体机架为扁钢压制而成，设计有自我保护装置，能大大减小土壤中的石块对机具的损坏。

1L series furrow plow is suitable for paddy and dry farming operations with a soil resistance of less than 0.8-1 kg/cm². It can not only meet the requirements of normal plowing depth but also satisfy the agricultural requirements of gradually deepening the plow layer (up to 30 cm). Featuring full suspension, the entire frame is made of pressed flat steel, and the design includes a self-protection device, that can significantly reduce the damage of soil stones to the plow.

Light Duty Furrow Plow参数表

型号 Model	1L-220	1L-320	1L-420	1L-520	1L-325	1L-425	1L-525
耕幅 Working of width (mm)	400	600	800	1000	750	1000	1250
耕深 Working of depth (mm)	200-250						
犁片数量 Q'ty of disc (pcs)	2	3	4	5	3	4	5
重量 Weight (kg)	64	100	130	170	180	240	270
配套马力 Tractor power (hp)	20-25	25-40	35-50	50-75	40	55	75
悬挂类别 Mounted cat	3 point cat I			3 point cat II			

Heavy Duty Furrow Plow参数表

型号 Model	1L-330	1L-430	1L-530	1L-335	1L-435	1L-535
耕幅 Working of width (mm)	900	1200	1500	1500	1050	1400
耕深 Working of depth (mm)	200-270					
犁片数量 Q'ty of disc (pcs)	3	4	5	3	4	5
重量 Weight (kg)	230	330	420	300	470	520
配套马力 Tractor power (hp)	55-60	65-75	80-100	60-70	75-80	90-100
悬挂类别 Mounted cat	3 point cat II					

Hydraulic Flip Plow

Parameter

铧式犁



液压翻转犁由拖拉机提供翻转动力，通过拖拉机液压输出阀控制，经转阀换向，实现犁架的左、右翻转，从而使左、右犁体交替工作。同时，由重锤式限深轮换位机构，实现犁架翻转过程中限深轮的工位变换，以满足左右犁体交替时的限深要求，经常用于田间碎土作业。

Hydraulic Flip Plow gets its turning power from a tractor. The plow frame can turn left and right under the control of tractor's hydraulic output. This allows the left and right plow bodies to work alternately. At the same time, a heavy-duty hammer-type depth limit wheel positioning mechanism changes the working position of the depth limit wheel during the plow frame's rotation, meeting the depth limit requirements when the left and right plow bodies alternate. This plow is often used for breaking up soil in fields.

Hydraulic Flip Plow参数表

型号 Model	1LF-225	1LF-325	1LF-425	1LF-525
耕幅 Working of width (mm)	500	750	1000	1250
耕深 Working of depth (mm)	220-270			
犁片数量 Q'ty of disc (pcs)	4	5	8	10
重量 Weight (kg)	330	400	530	650
配套马力 Tractor power (HP)	45-60	55-70	70-80	50-75
悬挂类别 Mounted cat	3 point cat II			

型号 Model	1L-430	1L-530	1L-535
耕幅 Working of width (mm)	1200	1500	1750
耕深 Working of depth (mm)	250-300		300-350
犁片数量 Q'ty of disc (pcs)	8	10	10
重量 Weight (kg)	680	880	960
配套马力 Tractor power (HP)	70-90	100-120	130-150
悬挂类别 Mounted cat	3 point cat II		

Cultivator Parameter

中耕机







3ZT 系列双弹簧中耕机采用双弹簧拉紧装置，当中耕机在工作过程中遇到障碍物时能自动弹起，越过后迅速恢复原来的工作状态，从而起到保护犁尖的作用，该机具有行距调整方便，深度调整易行的特点，可适用于棉花、玉米、豆类等松土作业。

The 3ZT series cultivator uses a double-spring tensioning device. When the cultivator encounters obstacles during operation, it can automatically spring up, quickly recover to its original working state after passing, and thereby protect the plow tips. This machine has the advantages of easy adjustment of row spacing and depth, and can be used for loosening soil operations such as cotton, corn, and legumes.

Cultivator参数表

型号 Model	3ZT-1.2	3ZT-1.4	3ZT-1.8
耕幅 Working of width (mm)	1200	1400	1800
耕深 Working of depth (mm)	100-250		
犁片数量 Q'ty of disc (pcs)	5	7	9
重量 Weight (kg)	260	320	400
配套马力 Tractor power (HP)	25-35	25-35	50-70
悬挂类别 Mounted cat	3 point cat I		3 point cat II

型号 Model	3ZT-2.2	3ZT-2.5	3ZT-3.0
耕幅 Working of width (mm)	2200	2500	3000
耕深 Working of depth (mm)	100-250		
犁片数量 Q'ty of disc (pcs)	11	13	15
重量 Weight (kg)	490	550	640
配套马力 Tractor power (HP)	60-80	80-90	100-110
悬挂类别 Mounted cat	3 point cat II		

Subsoiler Parameter

深松机







3S系列深松机主要用于马铃薯、豆类和棉花等农田的深层耕作。该设备具有打破表层土壤板结、疏松土壤、保持土壤水分以及粉碎作物残茬等功能。其特点是作业深度可调、适应性强、连接方便。

The 3S series subsoiler is mainly used for deep plowing fields of potatoes, beans, and cotton. It has the functions of breaking up surface soil compaction, loosening soil, maintaining groundwater, and killing crop residues. It features adjustable depth, wide adaptability, and easy coupling.

Subsoiler参数表

型号 Model	3S-1.0	3S-1.4	3S-1.8
耕幅 Working of width (mm)	1000	1400	1800
耕深 Working of depth (mm)	100-250		
犁片数量 Q'ty of disc (pcs)	5	7	9
重量 Weight (kg)	240	280	320
配套马力 Tractor power (HP)	25-35	40-60	50-70
悬挂类别 Mounted cat	3 point cat I		3 point cat II

型号 Model	3S-2.1	3S-2.6
耕幅 Working of width (mm)	2100	2500
耕深 Working of depth (mm)	100-250	
犁片数量 Q'ty of disc (pcs)	11	13
重量 Weight (kg)	370	450
配套马力 Tractor power (HP)	60-80	80-100
悬挂类别 Mounted cat	3 point cat II	

Trailer Parameter

拖车



7CX 系列自卸拖车可定制 3 吨至 12 吨载重量，经常用于田间运输作业。配备气刹刹车型式，制动效果好，稳定性强，安全性高。所有型号均为液压自卸方式，分为后卸倾倒或左右倾倒，液压千斤顶精选大缸径、长行程的优质油缸，具有承载能力强、起升速度快、防滑仿过载、清洁易维护等优点。

The 7CX series dump trailers can be customized with a load capacity of 3 tons to 12 tons, making them frequently used for agricultural transport tasks. They are equipped with air brake models, providing good braking performance, stability, and high safety. All models use hydraulic dumping methods, with options for rear or side dumping. The hydraulic jack is made of high-quality oil cylinders with large diameters and long stroke, offering advantages such as strong carrying capacity, fast lifting speed, anti-slip overload protection, and easy cleaning and maintenance.

Trailer参数表

型号 Model	7CX-5	7CX-6	7CX-8
载重 Rated load (Tons)	5	6	8
配套马力 Matched power (HP)	60-70	70-80	80-90
自重 Weight (KG)	1650	1900	2100
车厢尺寸 Box size (m)	3.95*2.15*0.55	4.5*2.15*0.55	4.5*2.2*(0.46+0.46)
整体尺寸 Total size (m)	5.75*2.25*2.2	5.75*2.25*2.2	5.8*2.25*2.25
轮胎数量 Number of tires (pcs)	4	4	4
轮胎规格 Tire size	8.25-16	9.00-16	445/45R19.5
制动方式 Brake type	Air brake		
卸料方式 Dump type	Hydraulic dump		
卸料方向 Dump direction	Side or rear		

型号 Model	7CX-9	7CX-10	7CX-12
载重 Rated load (Tons)	9	10	12
配套马力 Matched power (HP)	90-100	100-120	130-150
自重 Weight (KG)	2300	2700	3100
车厢尺寸 Box size (m)	4.5*2.2*(0.46+0.46)	4.5*2.2*(0.46+0.46)	4.9*2.2*(0.46+0.46)
整体尺寸 Total size (m)	5.8*2.25*2.25	5.8*2.25*2.25	6.2*2.3*2.25
轮胎数量 Number of tires (pcs)	4	4	4
轮胎规格 Tire size	445/45R19.5	445/45R19.5	445/45R19.5
制动方式 Brake type	Air brake		
卸料方式 Dump type	Hydraulic dump		
卸料方向 Dump direction	Side or rear		

Pneumatic Seeder

气吸式播种器



2BMYFQ气吸式精量播种机可一次完成开沟、侧施肥、破茬、播种、培土、镇压等作业，广泛适用于玉米、大豆、高粱、甜菜等大中籽粒穴播作物的免耕、少耕和常规耕地播种作业。种肥同施，播种效果好，出苗率高，并实现 4-8km / 小时的高效作业速度，根据产品结构及作业幅宽设计三点悬挂和牵引等多种挂接方式，行距调整方便，是目前节本增效最先进的精量播种机。

The 2BMYFQ air-suction precision seeder can finish tasks like furrowing, side fertilizing, stubble breaking, planting, cultivating, and pressing in one go. It is suitable for no-till, reduced-till, and conventional tillage seed planting of crops like corn, soybeans, sorghum, and beets. The simultaneous planting of seeds and fertilizer leads to good planting results and a high seedling emergence rate. It also achieves an efficient operating speed of 4 to 8 km/h. The drill is designed with various attachment methods like three-point suspension and traction, making it convenient to adjust row spacing. It is the most advanced precision seed drill for cost-saving and efficiency enhancement.

Parameter

Pneumatic Seeder参数表

型号 Model	2BMYFQ-4D	2BMYFQ-5D	2BMYFQ-6D	2BMYFQ-8D
长度 Total Length (L)(mm)	2000	2000	2000	2000
宽度 Total Width (W)(mm)	3000	3600	5900	7700
高度 Total Height (H)(mm)	1800	1800	1800	1800
重量 Weight (kg)	1200	1350	1500	2600
配套马力 Matching Power (HP)	90-120	110-140	130-160	150-180
工作宽度 Working Width (cm)	160-320	200-350	240-480	320-640
种/肥箱数 Seed/Fertilizer (rows)	4/4	5/5	6/6	8/8
行距 Rowing Space (cm)	40-75	40-75	40-75	40-75
耕深 Working Depth (mm)	0-100	0-100	0-100	0-100
肥箱容量 Fertilizer box capacity (kg)	160*2	160*2	160*2	160*4
种箱容量 Seed box capacity (L)	40*4	40*5	40*6	4*8

型号 Model	2BMYFQ-10D	2BMYFQ-12D	2BMYFQ-16D	2BMYFQ-18D
长度 Total Length (L)(mm)	2000	3400	3400	3400
宽度 Total Width (W)(mm)	8500	9000	11000	12000
高度 Total Height (H)(mm)	1800	1800	1800	1800
重量 Weight (kg)	3100	3300	3800	4100
配套马力 Matching Power (HP)	160-200	180-220	210-240	260-300
工作宽度 Working Width (cm)	400-800	480-960	640-1440	720-1200
种/肥箱数 Seed/Fertilizer (rows)	10/10	12/12	16/16	18/18
行距 Rowing Space (cm)	40-75	40-75	40-70	40-65
耕深 Working Depth (mm)	0-100	0-100	0-100	0-100
肥箱容量 Fertilizer box capacity (kg)	200*4	200*4	160*6	200*6
种箱容量 Seed box capacity (L)	40*10	40*12	40*16	40*18

Blown Sprayer Parameter

风送式喷雾器



Blown Sprayer参数表

型号 Model	3WFSX-300	3WFSX-400	3WFSX-600
风机直径 Fan diameter (mm)	600	800	800
净重 Weight (kg)	180	230	245
配套马力 Matched power (HP)	35-50	40-70	60-100
药泵流量 Drug pump flow (L/min)	32-48	50-60	50-60
工作压力 Injection pressure (Mpa)	1.0-4.0	3.5-5.0	3.5-5.0
药箱容积 (L) Medicine box volume (L)	300 (600斤)	400 (800斤)	600 (1200斤)
搅拌方式 Stirring method	回流搅拌 Recirculating mixing	回流搅拌 Recirculating mixing	回流搅拌 Recirculating mixing
喷头数量 No.of nozzles (pcs)	10	12	16
喷射高度 Spray height (m)	8	8	8
喷幅 Spray width (m)	15	15	15
外形尺寸 Dimenssion (mm)	1070*1020*1170	1280*1300*1250	1500*1300*1300

3WFSX 系列风送式喷雾机可与 35-100 马力拖拉机配套，整机结构合理，后悬挂式作业，作业效率可达 35 亩 / 小时，可满足多种喷洒作业要求。采用进口高强度铜制喷嘴，内置耐磨陶瓷喷片，喷嘴孔径 (1.2-1.5mm) 可快速切换，雾滴精细，喷射角度可调，并配备防滴阀；强力风送式结构配以高压力三缸柱塞泵，出口风力可达 30-35m/s，风量可调节，喷雾均匀穿透力强。

The 3WFSX series blown sprayers can match with 35-100hp tractor. Working efficiency 35 acres/hour, meeting the requirements of various spraying tasks. Uses high-strength copper nozzles and built-in wear-resistant ceramic spray discs. The nozzle orifice (1.2-1.5mm) can be quickly switched, with fine droplets and adjustable spray angles. It is equipped with a drip-preventing valve.The strong wind-driven structure is paired with a high-pressure three-cylinder plunger pump, with outlet wind speeds reaching 30-35m/s, adjustable air volume, and strong penetration.

Market Distribution & Service
市场区域及服务



01

主要市场地区：
西亚、中亚、东南亚、欧洲、南美、大洋洲、北非。
在东欧和中东地区设有海外仓和分公司。

Main Market: West Asia, Central Asia, Southeast Asia, Europe, South America, Oceania, North Africa.
We have overseas warehouses and branches in Eastern Europe and the Middle East.

02

齐陆在全球 20 多个国家拥有经销商，为我们的用户提供至少 12 个月、最长 18 个月的保修期。

Our Service: Qilu has dealers in more than 20 countries around the world and provides our users with a warranty period of at least 12 months and up to 18 months.

7*24小时的在线接待，不必担心时差造成的沟通困难，出现的任何售后都会有接线员及时处理；任何时间都会及时准确的回复每一位客户的询问。

7*24-hour online reception, eliminating the communication barriers caused by time zones. Any subsequent issues will be handled promptly by our customer service representatives. We will promptly and accurately respond to every customer's inquiry at any time.

Development Plan
发展战略规划



齐陆农机事业部将稳扎稳打，与经销商通力合作，形成以点带面的市场辐射效应。为支持经销商更好的推广和销售，齐陆根据当地国家习俗为每个地区量身定制精美礼品，帮助经销商组织各种赠礼活动和户外展销会。

Qilu Farm Machinery Department will steady and solidly advance, cooperate closely with distributors, and form a market radiation effect centered on points. To better support distributors in promoting and selling products, Qilu customizes exquisite gifts based on local customs for each region, helping distributors organize various gift activities and outdoor exhibition sales meetings.



对海外市场布局，齐陆集团公司已在南欧设立海外仓和分公司，未来将逐步在中东、东南亚、北美、南美设立分公司。以便深入开展市场调研，结合市场需求，优化供应链体系，拓宽产品线广度，在国际市场上保证自身竞争力。

For the overseas market layout, Qilu Group has already established overseas warehouses and subsidiaries in Southern Europe. In the future, we will gradually set up subsidiaries in Middle East, Southeast Asia, North America, and South America. This will enable us to carry out in-depth market research, combine market demand, optimize the supply chain system, broaden the product line breadth, and ensure our competitiveness in the international market.